

Technical Specifications

VZ/VZM SERIES – Heavy Duty Shredders

Fore More Info

Click Here ---->



VZ 17.00 / VZ 18.00
Inline set-up



VZM 17.00 / VZM 18.00
Inline set-up



Technical Data

| | | VZ/VZM 17.00 | VZ/VZM 18.00 | VZ/VZM 19.00 |
|------------------------|----------------|----------------------|----------------------|----------------------|
| Security level | DIN | 4 / 3 | 3 | 3 |
| Actual throughput | kg/h* | 600 / 650 | 850 | 1,000 |
| Motor power | kW (approx.) | 15.8 - 16.5 | 17.5 - 18.2 | 23.3 - 24.0 |
| Feed conveyor included | | yes | yes | yes |
| Dimensions L x W x H | cm** (approx.) | VZ 540 x 115 x 255 | VZ 540 x 115 x 255 | VZ 585 x 103 x 285 |
| | | VZM 635 x 115 x 290 | VZM 635 x 115 x 290 | VZM 741 x 103 x 311 |
| Weight | kg (approx.) | VZ 2,200 / VZM 2,500 | VZ 2,200 / VZM 2,500 | VZ 2,600 / VZM 2,900 |


*Values ascertained with new cutting systems, depends upon material to be shredded, supply power and feed system.

**When using in-line configuration of the models VZ/VZM 17.00, 18.00 and 19.00: with standard feed conveyor.



Continuous Feed

- Material is fed with a rugged, studded conveyor
- Conveyor belt with large capacity feed hopper allows for filling at an ergonomic height
- Large <http://www.monomachines.com/> materials from sliding back

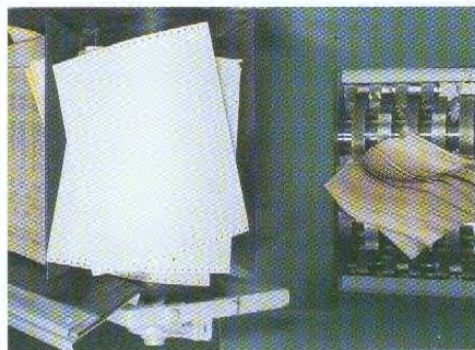

Stage 1: Pre-Shredding

- Thick bundles of paper are processed just as easily as filled ring binders
- Rough pre-shredding of materials is accomplished by means of abrasion-resistant cutting cylinders made of hardened tool steel



Integrated Conveyor Belt

- Covered transport from pre-shredding to the security cutting system
- A metering screw prevents paper jam and assures problem free operation
- Overfill protection is provided by